



FORETS

CARBURE MONOBLOC

LUBRIFICATION

INTERIEURE

Sélection





FORETS CARBURE MONOBLOC 2 LEVRES DIN 6537

Longueur 3D - **Lubrification interne**

Non-revêtus ou Revêtement pour matériaux trempés, collants et tendres



Solid carbide drills 3xØ - 2 flutes - Internal cooling - Uncoated or Coating for steels and stainless steels



Brocas MD integral 3xØ - 2 labios - Refrigeración interna - Sin o con Recubrimiento para aceros e inox



Punte MD integrale 3xØ - 2 taglienti - Refrig. interna - Non rivestiti o Rivestimento per acciai ed acciai inossidabili




VHM Spiralbohrer 3xØ - 2 Schneiden - Mit Innenkühlung - Unbeschichtet oder Beschichtung für Stähle und Edelstähle



Ø	d	L	I	LQ	Z
3	6	62	20	36	2
3.1 → 3.7	6	62	20	36	2
3.8 & 3.9	6	66	24	36	2
4	6	66	24	36	2
4.1 → 4.7	6	66	24	36	2
4.8 & 4.9	6	66	28	36	2
5	6	66	28	36	2
5.1 → 5.9	6	66	28	36	2
6	6	66	28	36	2
6.1 → 6.9	8	79	34	36	2
7	8	79	34	36	2
7.1 → 7.9	8	79	41	36	2
8	8	79	41	36	2
8.1 → 8.9	10	89	47	40	2
9	10	89	47	40	2
9.1 → 9.9	10	89	47	40	2
10	10	89	47	40	2
10.1 → 10.9	12	102	55	45	2
11	12	102	55	45	2
11.1 → 11.9	12	102	55	45	2
12	12	102	55	45	2
12.1 → 12.9	14	107	60	45	2
13	14	107	60	45	2
14	14	107	60	45	2
15	16	115	65	48	2
16	16	115	65	48	2
17	18	123	73	48	2
18	18	123	73	48	2
20	20	131	79	50	2

Ex. ref. Ø3.1 = FOC130-003.100

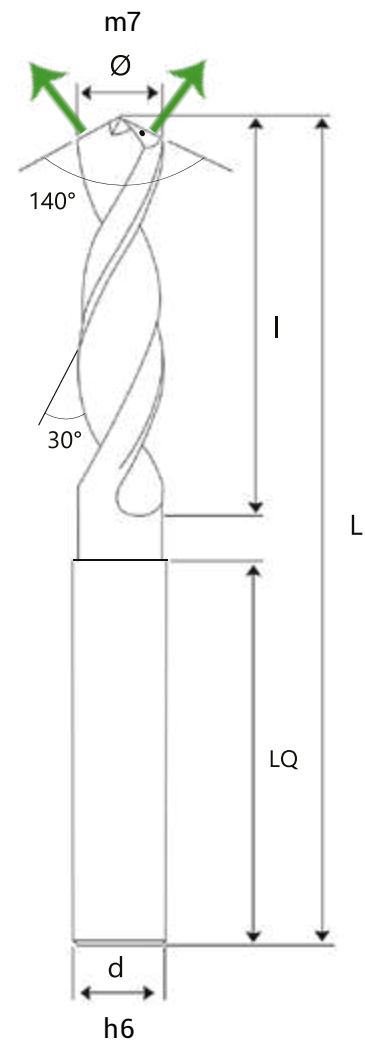



FORETS CARBURE MONOBLOC 2 LEVRES DIN 6537

Longueur 5D - **Lubrification interne**

Non-revêtus ou Revêtement pour matériaux trempés, collants et tendres



Solid carbide drills 5xØ - 2 flutes - Internal cooling - Uncoated or Coating for steels and stainless steels




Brocas MD integral 5xØ - 2 labios - Refrigeración interna - Sin o con Recubrimiento para aceros e inox



Punte MD integrale 5xØ - 2 taglienti - Refrig. interna - Non rivestiti o Rivestimento per acciai ed acciai inossidabili




VHM Spiralbohrer 5xØ - 2 Schneiden - Mit Innenkühlung - Unbeschichtet oder Beschichtung für Stähle und Edelstähle



Ø	d	L	I	LQ	Z
3	6	66	28	36	2
3.1 → 3.7	6	66	28	36	2
3.8 & 3.9	6	74	36	36	2
4	6	74	36	36	2
4.1 → 4.7	6	74	36	36	2
4.8 & 4.9	6	82	44	36	2
5	6	82	44	36	2
5.1 → 5.9	6	82	44	36	2
6	6	82	44	36	2
6.1 → 6.9	8	91	53	36	2
7	8	91	53	36	2
7.1 → 7.9	8	91	53	36	2
8	8	91	53	36	2
8.1 → 8.9	10	103	61	40	2
9	10	103	61	40	2
9.1 → 9.9	10	103	61	40	2
10	10	103	61	40	2
10.1 → 10.9	12	118	71	45	2
11	12	118	71	45	2
11.1 → 11.9	12	118	71	45	2
12	12	118	71	45	2
12.1 → 12.9	14	124	77	45	2
13	14	124	77	45	2
14	14	124	77	45	2
15	16	133	83	48	2
16	16	133	83	48	2
17	18	143	93	48	2
18	18	143	93	48	2
20	20	153	101	50	2

Ex. ref. Ø3.1 = FOC150-003.100

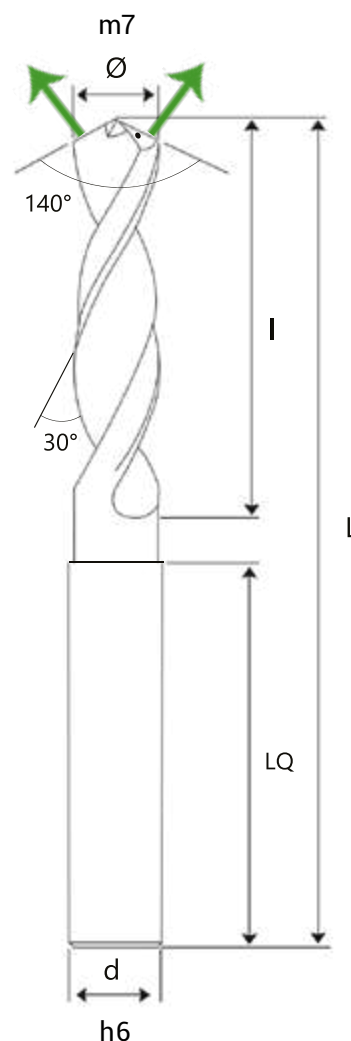

FOC 180

FORETS CARBURE MONOBLOC 2 LEVRES DIN 6537

Longueur 8D - **Lubrification interne**

Non-revêtus ou Revêtement pour matériaux trempés, collants et tendres



Solid carbide drills 8xØ - 2 flutes - Internal cooling - Uncoated or Coating for steels and stainless steels



Brocas MD integral 8xØ - 2 labios - Refrigeración interna - Sin o con Recubrimiento para aceros e inox



Punte MD integrale 8xØ - 2 taglienti - Refrig. interna - Non rivestiti o Rivestimento per acciai ed acciai inossidabili



VHM Spiralbohrer 8xØ - 2 Schneiden - Mit Innenkühlung - Unbeschichtet oder Beschichtung für Stähle und Edelstähle




**SOLID
WC**

**DIN
6537**

**1/10
mm**

MACH 1

Ø	d	L	I	LQ	Z
3	6	72	34	36	2
3.1 → 3.7	6	72	34	36	2
3.8 & 3.9	6	81	43	36	2
4	6	81	43	36	2
4.1 → 4.7	6	81	43	36	2
4.8 & 4.9	6	95	57	36	2
5	6	95	57	36	2
5.1 → 5.9	6	95	57	36	2
6	6	95	57	36	2
6.1 → 6.9	8	114	76	36	2
7	8	114	76	36	2
7.1 → 7.9	8	114	76	36	2
8	8	114	76	36	2
8.1 → 8.9	10	142	95	40	2
9	10	142	95	40	2
9.1 → 9.9	10	142	95	40	2
10	10	142	95	40	2
10.1 → 10.9	12	162	114	45	2
11	12	162	114	45	2
11.1 → 11.9	12	162	114	45	2
12	12	162	114	45	2
12.1 → 12.9	14	178	133	45	2
13	14	178	133	45	2
14	14	178	133	45	2
15	16	203	152	48	2
16	16	203	152	48	2
17	18	222	171	48	2
18	18	222	171	48	2
20	20	243	190	50	2

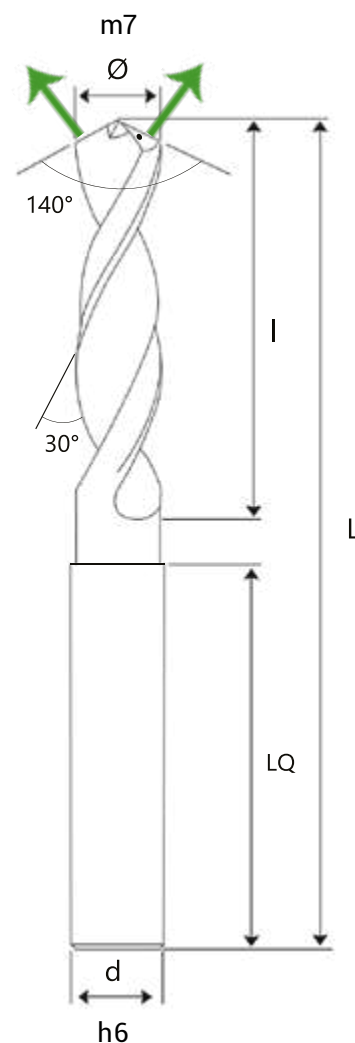

Ex. ref. Ø3.1 = FOC180-003.100



FORETS CARBURE MONOBLOC 2 LEVRES DIN 6537

Longueur 15D - **Lubrification interne**

Non-revêtus ou Revêtement pour matériaux trempés, collants et tendres



Solid carbide drills 15xØ - 2 flutes - Internal cooling - Uncoated or Coating for steels and stainless steels




Brocas MD integral 15xØ - 2 labios - Refrigeración interna - Sin o con Recubrimiento para aceros e inox



Punte MD integrale 15xØ - 2 taglienti - Refrig. interna - Non rivestiti o Rivestimento per acciai ed acciai inossidabili




VHM Spiralbohrer 15xØ - 2 Schneiden - Mit Innenkühlung - Unbeschichtet oder Beschichtung für Stähle und Edelstähle



Ø	d	L	I	LQ	Z
3	6	95	55	36	2
3.1 → 3.7	6	104	64	36	2
3.8 & 3.9	6	104	64	36	2
4	6	104	64	36	2
4.1 → 4.7	6	131	91	36	2
4.8 & 4.9	6	131	91	36	2
5	6	131	91	36	2
5.1 → 5.9	6	149	109	36	2
6	6	149	109	36	2
6.1 → 6.9	8	167	127	36	2
7	8	167	127	36	2
7.1 → 7.9	8	185	145	36	2
8	8	185	145	36	2
8.1 → 8.9	10	207	163	40	2
9	10	207	163	40	2
9.1 → 9.9	10	226	182	40	2
10	10	226	182	40	2
10.1 → 10.9	12	249	200	45	2
11	12	249	200	45	2
11.1 → 11.9	12	267	218	45	2
12	12	267	218	45	2
12.1 → 12.9	14	285	236	45	2
13	14	285	236	45	2
14	14	303	254	45	2

Ex. ref. Ø3.1 = FOC115-003.100

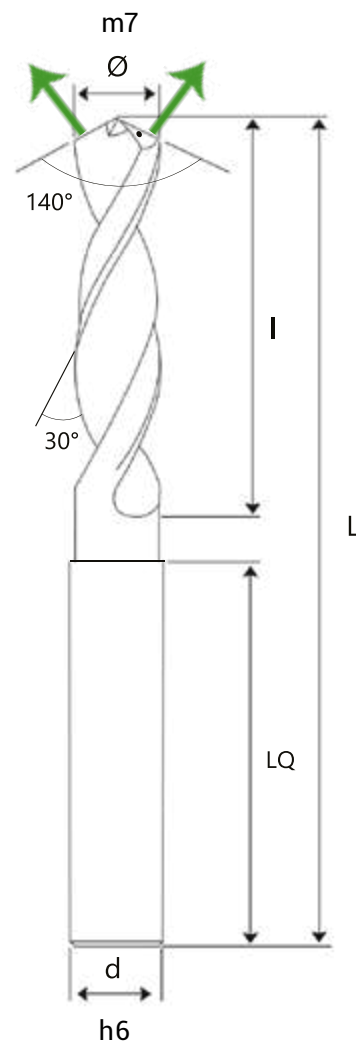

FOC 113

FORETS CARBURE MONOBLOC 3 LEVRES SIMILAIRES DIN 6539

Longueur 3D - **Lubrification interne**

Non-revêtus ou Revêtement pour matériaux trempés, collants et tendres



Solid carbide drills 3xØ - 3 flutes - Internal cooling - Uncoated or coated



Brocas MD integral 3xØ - 3 labios - Refrigeración interna - Sin o con recubrimiento



Punte MD integrale 3xØ - 3 taglienti - Refrigerazione interna - Non rivestiti o rivestiti



VHM Spiralbohrer 3xØ - 3 Schneiden - Mit Innenkühlung - Unbeschichtet oder beschichtet



**SOLID
WC**

**DIN
6539**

**1/10
mm**

MACH 1

Ø	d	L	I	LQ	Z
3	6	62	20	36	3
3.1 → 3.7	6	62	20	36	3
3.8 & 3.9	6	66	24	36	3
4	6	66	24	36	3
4.1 → 4.7	6	66	24	36	3
4.8 & 4.9	6	66	28	36	3
5	6	66	28	36	3
5.1 → 5.9	6	66	28	36	3
6	6	66	28	36	3
6.1 → 6.9	8	79	34	36	3
7	8	79	34	36	3
7.1 → 7.9	8	79	41	36	3
8	8	79	41	36	3
8.1 → 8.9	10	89	47	40	3
9	10	89	47	40	3
9.1 → 9.9	10	89	47	40	3
10	10	89	47	40	3
10.1 → 10.9	12	102	55	45	3
11	12	102	55	45	3
11.1 → 11.9	12	102	55	45	3
12	12	102	55	45	3
12.1 → 12.9	14	107	60	45	3
13	14	107	60	45	3
14	14	107	60	45	3
15	16	115	65	48	3
16	16	115	65	48	3
17	18	123	73	48	3
18	18	123	73	48	3
20	20	131	79	50	3

Ex. ref. Ø3.1 = FOC113-003.100

