

REDRESSEURS CARBURE MONOBLOC




RDC730

Avant alésage

Surépaisseur régulière

Réalignement des trous
dans les pièces brutes
de fonderie et pièces
trempées

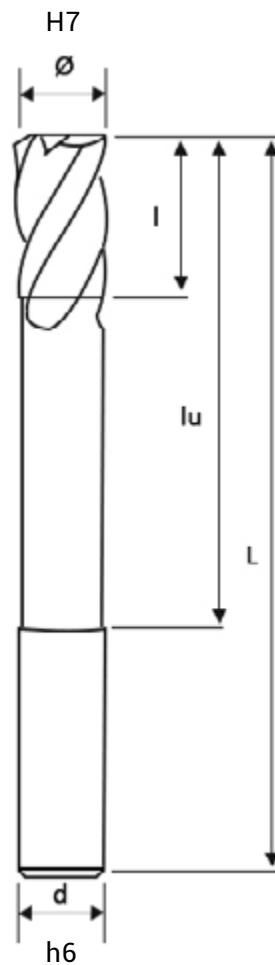

Ø	d	L	I	lu	Z
3.7 → 4.1	4	75	12	45	3
4.2 → 4.6	4	80	12	52	3
4.7 → 5.1	5	86	16	56	3
5.2 → 5.6	5	86	16	56	3
5.7 → 6.1	6	86	16	56	3
6.2 → 6.6	6	86	16	56	3
6.7 → 7.1	8	86	16	56	3
7.2 → 7.6	8	86	16	56	3
7.7 → 8.1	8	86	16	56	3
8.2 → 8.6	8	90	20	60	3
8.7 → 9.1	10	90	20	60	3
9.2 → 9.6	10	90	20	60	3
9.7 → 10.1	10	90	20	60	3
10.2 → 10.6	10	90	20	60	3
10.7 → 11.1	10	90	20	60	3
11.2 → 11.6	12	90	20	60	3
11.7 → 12.1	12	90	20	60	3
12.2 → 12.6	12	100	25	70	3
12.7 → 13.1	12	100	25	70	3

Ex. ref. Ø3.8 = RDC730-003.800

EUROMAC

7 route de Sainte Montaine
ZA Les Pointards, 18410
Brinon-sur-Sauldre, France

TEL: +33 (0) 2 48 81 51 00
euromac@euromac.tools

S U I V E Z - N O U S

